


Product data sheet

LED universal dimming actuator, 4-gang

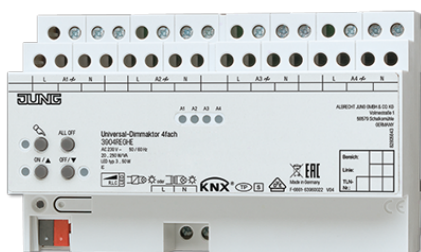

Reference number

3904 REGHE

LED universal dimming actuator, 4-gang

4 x 250 W, HV LED lamps typ. 4 x 3 ... 50 W

1 x 950 W

Rail mounting device, 8 rail units

ETS product family: Illumination

Product type: Dimmer

Intended use

- Switching and dimming of incandescent lamps, HV halogen lamps, dimmable HV LED lamps, dimmable compact fluorescent lamps, dimmable inductive transformers with LV halogen or LV LED lamps, dimmable electronic transformers with LV halogen or LV LED lamps
- Mounting on DIN rail according to EN 60715 in distribution boxes

Product characteristics

- Automatic or manual selection of the dimming principle suitable for the load
- Protected against no-load, short-circuit and overheating
- Signal in the event of a short-circuit
- Outputs can be operated manually
- Feedback of the switching position and the dimming value
- Parameterisable switch-on and dimming behaviour
- Time functions: switch-on delay, switch-off delay, staircase lighting timer with run-on time
- Light scene operation
- Disabling of individual outputs manually or by bus
- Status indicator of the outputs via LED
- Operating hours counter
- Mains failure longer than approx. 5 seconds leads to switch-off of the dimmer actuator.
- Depending on the parameter setting, the connected load is calibrated after resumption of power supply.
- Increase in output power possible through parallel switching of multiple outputs (max. 950 W)
- Power extension possible by means of power boosters (ref.-no. ULZ 1755 REG)
- Optional accessory: compensation module LED, ref.-no.: KM LED 230 U

Technical data

Rated voltage:	AC 110 ... 230 V ~, 50/60 Hz
Power loss:	max. 8 W
Stand-by power:	max. 1.4 W
Ambient temperature:	-5 ... +45 °C
Storage/transport temperature:	-25 ... +70 °C
Contact type:	, MOSFET
Lamp loads	
Connected load, 230 V per output	
Incandescent lamps:	20 ... 250 W
HV halogen lamps:	20 ... 250 W
Inductive transformers:	20 ... 250 VA

Inductive transformers with LV LED:	20 ... 100 VA
Electronic transformers:	20 ... 250 W
Electronic transformers with LV LED:	20 ... 100 W
Dimmable HV LED lamps:	typical 3 ... 50 W
Dimmable compact fluorescent lamps:	typical 3 ... 50 W
With setting "LED trailing edge phase control" the max. connection power for HV LED lamps and electronic transformers with LV LED doubles.	
Ohmic-inductive:	20 ... 250 VA
Ohmic-capacitive:	20 ... 250 W
Capacitive-inductive:	not permitted
Connected load, 110 V per output	
Incandescent lamps:	20 ... 120 W
HV halogen lamps:	20 ... 120 W
Inductive transformers:	20 ... 120 VA
Inductive transformers with LV LED:	20 ... 50 VA
Electronic transformers:	20 ... 120 W
Electronic transformers with LV LED:	20 ... 50 W
Dimmable HV LED lamps:	typical 3 ... 24 W
Dimmable compact fluorescent lamps:	typical 3 ... 24 W
With setting "LED trailing edge phase control" the max. connection power for HV LED lamps and electronic transformers with LV LED doubles.	
Ohmic-inductive:	20 ... 120 VA
Ohmic-capacitive:	20 ... 120 W
Capacitive-inductive:	not permitted
Connection	
Connection mode:	screw terminals
single wire:	0.5 ... 4 mm ²
stranded without ferrule:	0.5 ... 4 mm ²
stranded with ferrule:	0.5 ... 2.5 mm ²
Mounting width:	144 mm (8 rail units)
Approvals:	VDE

