


# Product data sheet

Triple-tone door signal

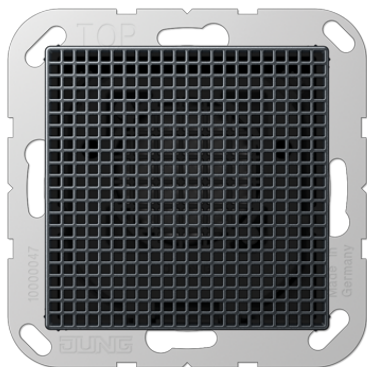


---

**Reference number**


---

A 567-G3 ANM

**Triple-tone door signal**

with supporting frame, screw fixing only

2 separate terminals for 2 or 3 tone signal  
 power supply: 8 ... 12 V AC or 8 ... 24 V DC, via external power supply (SELV) e.g. ref.-no.  
 NT 2405 VDC or NT 2415 REG VDC  
 current consumption: approx. 150 mA

**Accessories:**

dismounting protection ref.-no.: M-DMS

**Thermoplastic (breakproof) lacquered**
**Colour:**

matt anthracite

**Material:**

thermoplastic lacquered

---