


Product data sheet

Triple-tone door signal

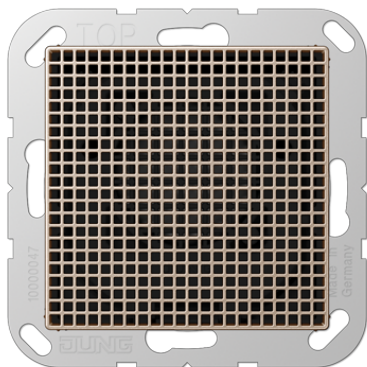

Reference number

A 567-G3 CH

Triple-tone door signal

with supporting frame, screw fixing only

2 separate terminals for 2 or 3 tone signal
 power supply: 8 ... 12 V AC or 8 ... 24 V DC, via external power supply (SELV) e.g. ref.-no.
 NT 2405 VDC or NT 2415 REG VDC
 current consumption: approx. 150 mA

Accessories:

dismounting protection ref.-no.: M-DMS

Thermoplastic (breakproof) lacquered

Colour:

champagne

Material:

thermoplastic lacquered