


Schede tecniche di Prodotto

Smart Control 19

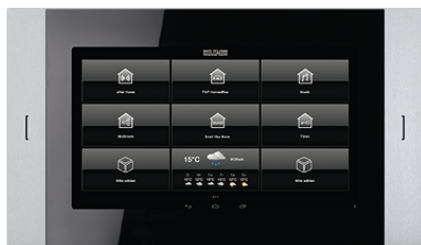

Numero di riferimento

SC 19.1

Smart Control 19

aspect ratio 16:9
for installation in walls, capacitive touch screen
fanless, without rotating parts

Uso conforme

- Visualisation and operation of system statuses and information on building automation
- For horizontal installation
- Montaggio nel scatola da incasso

Caratteristiche del prodotto

- KNX visualisation in combination with Visu Pro Server (ref.-no.: JVP-SERVER-H2, JVP-SENEC-H2)
- KNX visualisation in combination with Smart Visu Server (ref.-no.: SV-SERVER-INT)
- eNet visualisation in combination with eNet server for rail mounting (ref.-no.: ENET-SERVER) with software version 2.2 or higher
- Door call function only in combination with Siedle Smart Gateway SG 650-.. or SG 150-..
- Pre-installed weather page
- Display of up to six IP camera images
- Funzione di pulizia
- Smart Gateway with integrated image storage

Si prega di verificare le note di rilascio (Release Notes).

Accessori:

Scatola da incasso n. art.: SC 19 EBG
Alimentatore n. art.: NT 2415 REG VDC

Dati tecnici

Diagonale dello schermo:	470 mm / 18.5"
Risoluzione:	WXGA (1366 x 768), LED backlight display
Dimensioni placca (L x A):	600 x 345 mm
Potenza assorbita:	max. 30 W
Power supply:	DC 12 ... 32 V via external power supply (ref.-no. NT 2415 REG VDC, not included)
Sistema operativo:	Android 6
Processore:	Cortex-A53
Memoria primaria:	2 GB
Memoria di massa:	16 GB Flash (available disc space depends on operating system)
Slot per scheda di memoria:	microSD
Altoparlante:	integrato
Microfono:	integrato

USB ports:	2 x USB 2.0 1 x Mini-USB OTG (accessible from the front)
LAN connections:	1 x 10/100/1000 Mbit/s
Temperatura ambiente:	0 ... +30 °C
Versione:	
47 cm – 18.5"	